


## R2875P GENERAL FITMENT INTRUCTIONS

Mercedes Benz C200d, E200d, GLE300d 2.0L OM654.920 engine;  
S350d, S400dL 3.0L OM656.929 engine



The sealing rod must be pushed all the way into the drain hole

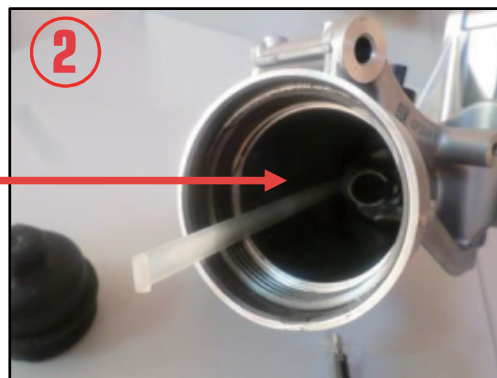

**1. Insert the sealing rod into the housing and install the cartridge element, making sure the end cap of the rod is “clipped” onto the black plastic end cap of the element (Fig 2 & 3).**

**2. Screw the housing cap on and tighten to manufacturer’s recommended torque. To ensure the filter element and the rod are properly installed, after opening the housing the rod must stay with the filter element (Fig. 4).**

**3. If the sealing rod is not mounted properly the filter element will be in incorrect position leading to loss of engine oil pressure and engine light on.**

