


## **R2828P GENERAL FITMENT INTRUCTIONS**

### **BMW X4 F26 B47D40A 2.0L Turbo 06/14 - On.**

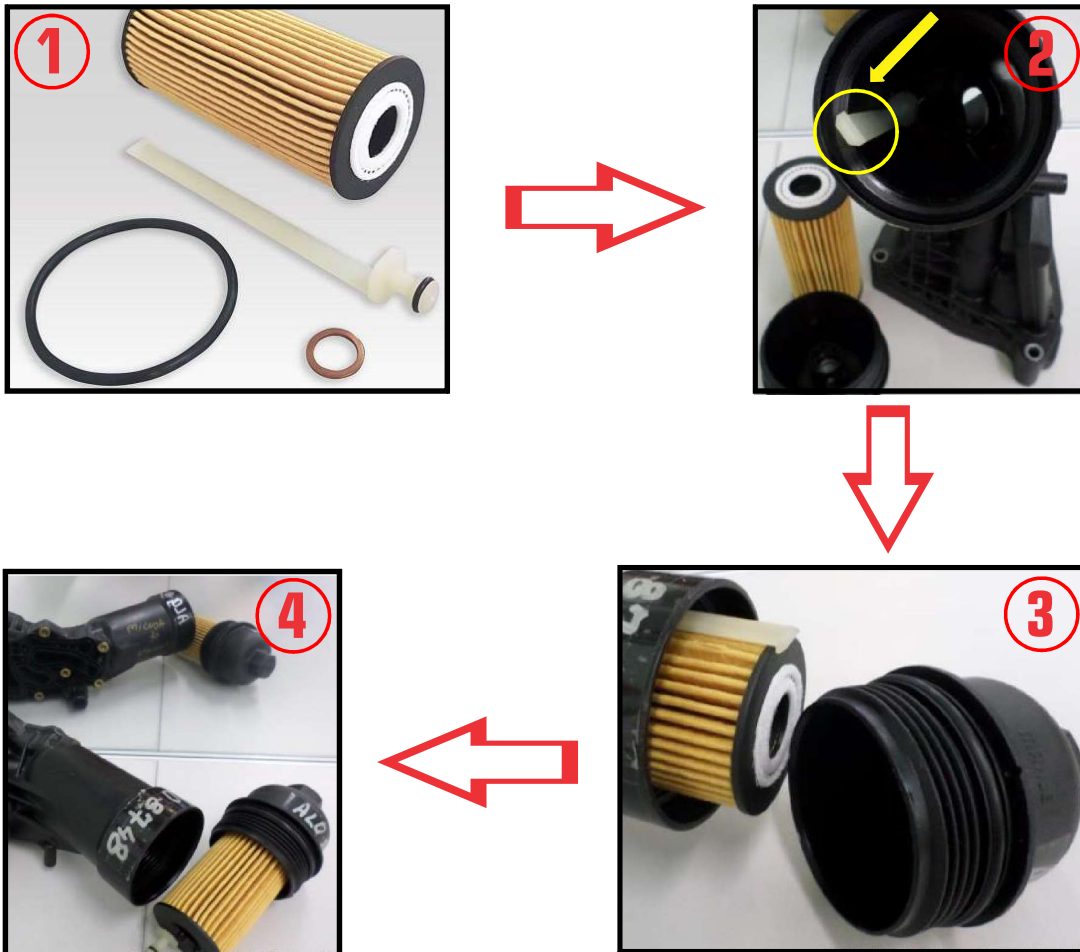

**1. Insert the sealing rod into the housing and install the cartridge element, marking sure the end cap of the rod is “clipped” onto the black plastic end cap of the element (Fig 2 & 3).**

**2. Screw the housing cap on and tighten to manufacturer’s recommended torque. The way to ensure the filter element and the rod are properly installed is after opening the housing the rod must stay with the filter element (Fig. 4).**

**3. If the sealing rod is not mounted properly the filter element will be in incorrect position leading to loss of engine oil pressure and engine light on.**

