

RYCO FILTERS




FITTING INSTRUCTIONS FOR RYCO CABIN FILTERS RCA155C & RCA176C.


M/B Sprinter - VW LT

(Filter is located in engine bay below windscreen)


- ① Unfasten velcro (Bur) fasteners on the foam cover, Pull the cover up slightly and disengage.

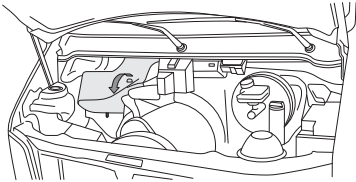


- ② Fold the cover down and away.

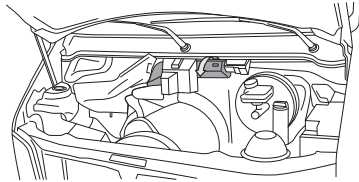


- ③ Disconnect one quick-release fastener on front, With the left hand, reach through from underneath and disengage the rear quick-release fastener.

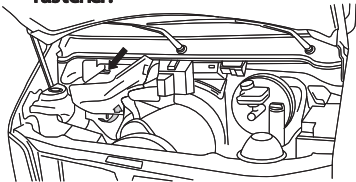


- ④ Push filter cover to the right and remove.

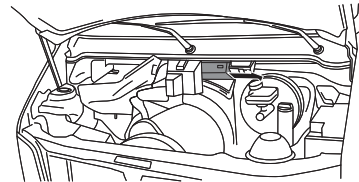

- ⑤ Remove used filter and replace with Ryco RCA176C noting direction of air flow

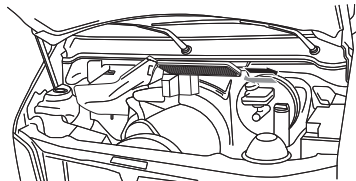

- ⑥ Push on filter cover and locate foam cover in position.
Dispose of used filter correctly.

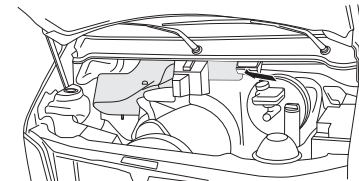

RYCO Group Pty Ltd
29 Taras Ave Altona North
Victoria 3025 Australia.
www.rycofilters.com.au

RYCO Group -
A division of GUD (NZ) Holdings Limited
626A Rosebank Road Avondale
Auckland, New Zealand
www.ryco.co.nz