

# RYCO FILTERS




## FITTING INSTRUCTIONS FOR RYCO CABIN AIR FILTER RCA182M


MITSUBISHI OUTLANDER (ZG & ZH) (pictured).

ALFA ROMEO 159, BRERA, SPIDER & MITSUBISHI ASX (GA), LANCER (CJ)


Filter is located behind glove box

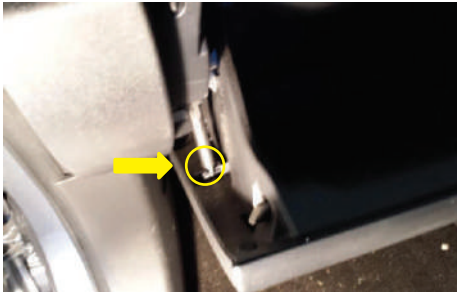


The cabin air filter housing is located behind the glovebox. To gain access, the glovebox has to first be removed. Remove objects from compartment and unclip the strut shown in pic above.

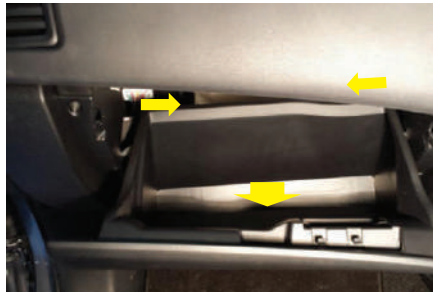

With the strut unclipped, proceed to release the glove box from its securing hinge. Simply apply some pressure to the far upper corners towards the inside of the compartment as indicated in the pic and slowly drop the unit.

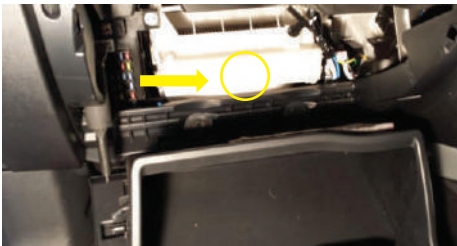

With the glove box unit out of the way the housing will be easily identifiable sitting on top of the blower fan. Remove the housing lid and pull out the dirty filter and clean area from large objects trapped in the housing.

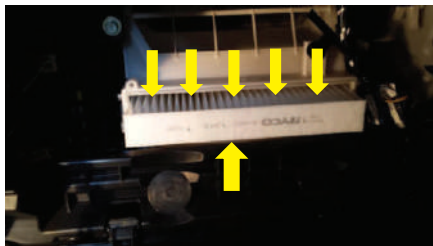

Insert the new filter in the right air flow direction. Look for arrow on one of the sides of the filter to identify air flow direction. Re-fit all components in reverse order.

**RYCO Group Pty Ltd**  
29 Taras Ave Altona  
North Victoria 3025  
Australia  
[www.rycofilters.com.au](http://www.rycofilters.com.au)

**RYCO Group- A division of**  
**GUD (NZ) Holdings Limited.**  
19 Bell Avenue, Otahuhu,  
Auckland 1060, New Zealand  
[www.ryco.co.nz](http://www.ryco.co.nz)