



RCA162M


FILTER LOCATED IN ENGINE BAY, BENEATH WINDSCREEN, PASSENGER SIDE

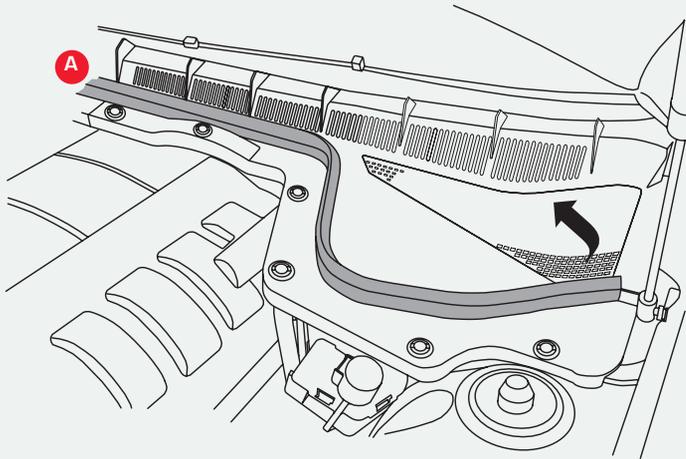


STEP 1
Starting at the passenger side, peel the weather strip back to the end of the plenum cover [A].

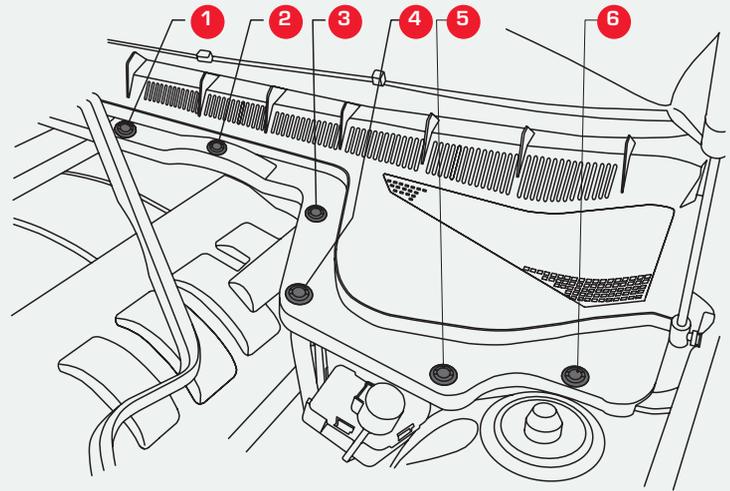

STEP 2
Remove the six (6) scrivenets, use a flat bladed screwdriver by inserting the blade into the slot and twisting to lift the centre piece, then removing the scrivenet.

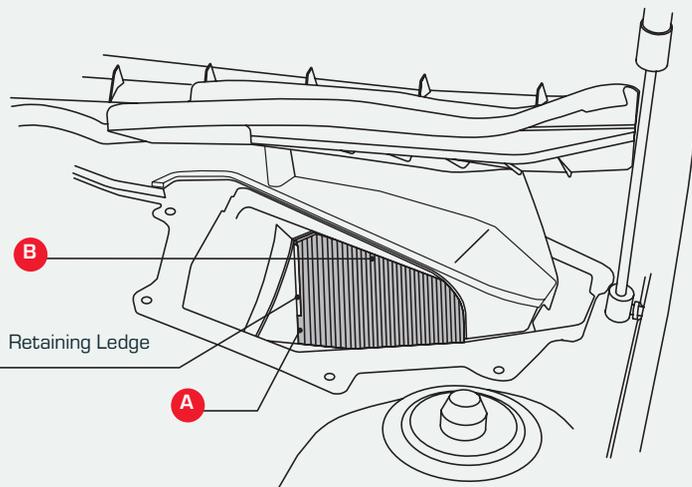

STEP 3
Ease the plenum cover past the bonnet strut and clean any debris from the housing. To remove the mesh screen, hold at point "A" with long nose pliers and move the screen over the retaining ledge. Discard the screen as it is no longer needed. To remove the filter hol pleat at point "B" and pull out from the top.

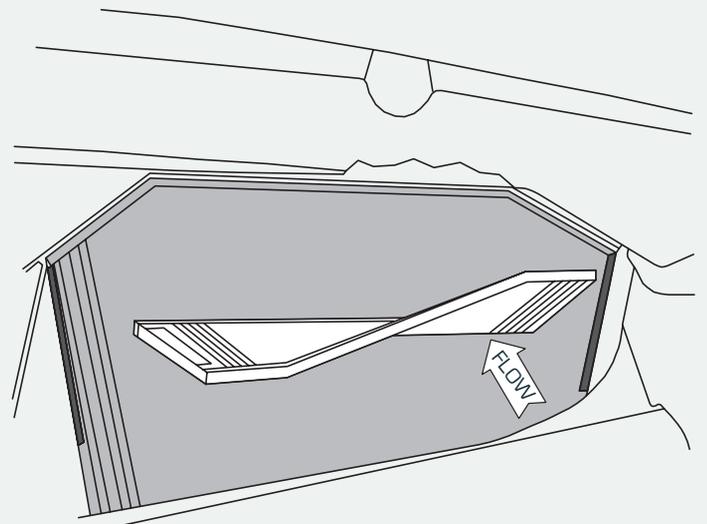

STEP 4
Clean debris from inside filter housing. Slide the new filter into the housing. Filter can be twisted as shown to assist fitting to housing. Ensure filter is seated correctly behind retaining ledges. Refit all components in reverse order.