


# RYCO FILTERS



## FITTING INSTRUCTIONS FOR RYCO CABIN FILTER RCA212P. JEEP CHEROKEE (KK) & DODGE NITRO

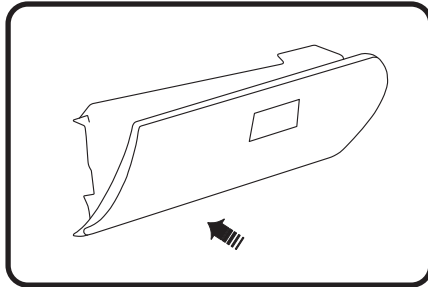

1. The cabin air filter is located behind the glove box compartment, it will have to be removed to gain access to the cabin air filter. This vehicle requires two filters Ryco supply these together in one box.
2. Open the glove box and press inwards on both top corners so that there taining lugs can be bypassed then let the compartment drop completely, unhinge and remove.
3. Identify the cabin air filter housing and unclip the lid.
4. Grab and slide out the first old cabin air filter carefully to avoid any accumulated debris from being spread around. Grab the second filter and do the same procedure as with the first. Clean the area and insert the new filters making sure they face in the right air flow direction. Refit all components in reverse order.

Ryco Group Pty Ltd  
29 Taras Ave Altona North  
Victoria 3025 Australia.  
[www.rycofilters.com.au](http://www.rycofilters.com.au)

RYCO Group  
A division of GUD NZ Holdings Ltd  
626A Rosebank Road Avondale  
Auckland, New Zealand  
[www.ryco.co.nz](http://www.ryco.co.nz)