
RYCO

RYCO CABIN AIR FILTER RCA182M

FITMENT INSTRUCTIONS

MITSUBISHI OUTLANDER, ALFA ROMEO 159, BRERA, SPIDER & MITSUBISHI ASX, LANCER

FILTER IS LOCATED BEHIND THE GLOVE BOX

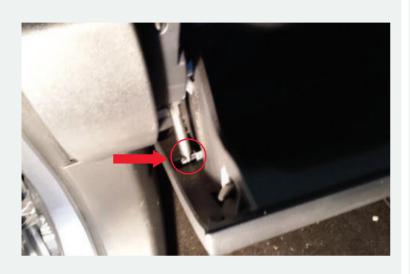





STEP 1

The cabin air filter housing is located behind the glovebox. To gain access, the glove box has to first be removed. Remove objects from the compartment and unclip the strut shown in pic above.

STEP 2

With the strut unclipped, proceed to release the glove box from its securing hinge. Simply apply some pressure to the far upper corners towards the inside of the compartment as indicated and slowly drop the unit.

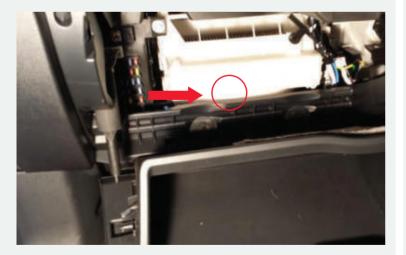

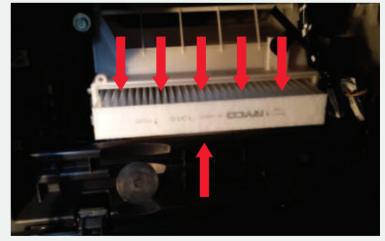

STEP 3

With the glove box unit out of the way the housing will be easily identifiable sitting on top of the blower fan. Remove the housing lid and pull out the dirty filter and clean area from comtaminants trapped in the housing.

STEP 4

Insert the new filter in the right air flow direction. Look for arrow on one of the sides of the filter to identify the air flow direction. Re-fit all components in reverse order.

