

# RYCO FILTERS



FITTING INSTRUCTIONS FOR RYCO FUEL FILTER Z704.  
TOOLS REQUIRED: SMALL SCREWDRIVER & NEEDLE NOSE PLIERS.

## **IMPORTANT**

See owners manual for-

- : Release of fuel pressure.
- : Removal of filter assembly from vehicle.
- : Removal of pump etc.




1: Use screwdriver or needle nose pliers to remove wire clip



2: Pull connector up to remove from body



3: Undo 2 clips using small screwdriver and remove adaptor.

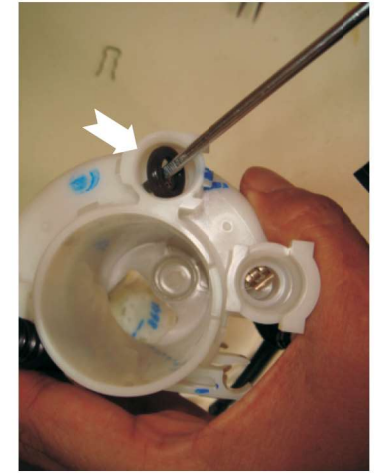

4: Remove seal from body.



5: Remove fuel line from clip.



6: Remove tube from clips.



7: Push filter towards top of assembly and remove 2 circlips using needle nose pliers .



8: Diss-assembled filter assembly.

Reassemble in reverse order using new parts as packed with filter.

Dispose of old filter correctly.