


RYCO FILTERS



FITTING INSTRUCTIONS FOR RYCO CABIN FILTER RCA344C

MITSUBISHI TRITON (MQ)

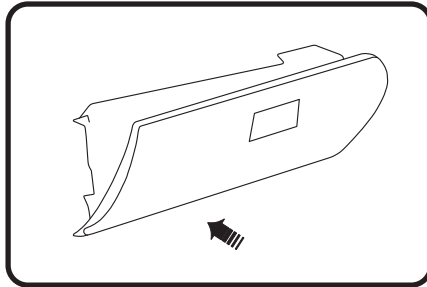

1. The cabin air filter is located behind the glove box.
2. Open the glove box and press inwards on both top corners so that the opening stops can be bypassed. Lower the glove box fully on the hinge.
3. Remove the screws and clip fastening the trim panel behind the glove box. Remove the trim panel and wiring harness connector.
4. Remove the cabin air filter housing cover and cabin air filter. Remove any remaining debris in the cabin air filter housing.
5. Install the new cabin air filter. Look for the flow arrow on the cabin air filter. Refit all components in reverse order.

RYCO Group Pty Ltd
29 Taras Ave Altona
North Victoria 3025
Australia
www.rycofilters.com.au

RYCO Group- A division of
GUD (NZ) Holdings Limited.
19 Bell Avenue, Otahuhu,
Auckland 1060, New Zealand
www.ryco.co.nz